
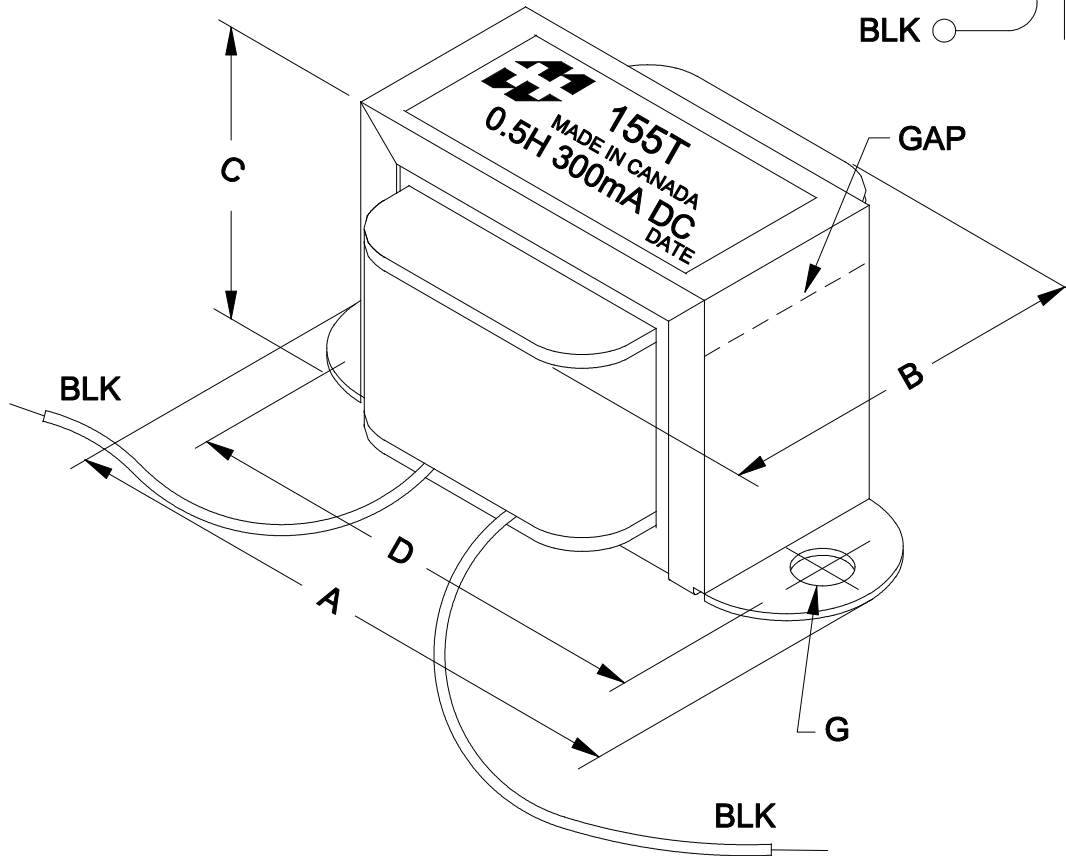


DIMENSIONS:	
A	2.375" ±0.063
B	1.500" ±0.125
C	1.375" ±0.063
D	2.000" ±0.063
G	0.187" ±0.063

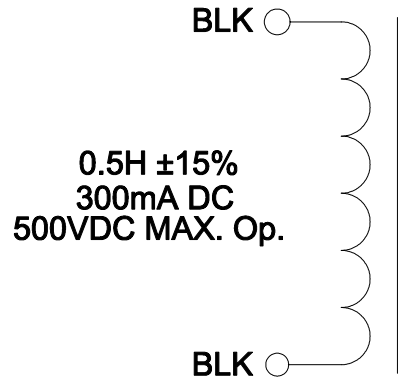

NOTE: ALL LEADS ARE 5" MIN. LONG OUT.  
CLASS B (130°C) INSULATION  
RoHS COMPLIANT

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
INDUCTANCE	@ 30V, 60Hz, 300mA DC, BLK - BLK	0.5H ±15%
DCR	@ 20°C, BLK - BLK =	29.87 Ω ±15%
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC

**HAMMOND**  
**MANUFACTURING**™

**ELECTRONIC DIVISION**  
52 RANKIN PLACE,  
WATERLOO, ONTARIO, N2J 3Z5  
PH # (519) 886-6181  
FAX # (519) 886-9540

TITLE

CHOKE

NO	DATE	REVISION	DWG. BY
0	11/28/12	RELEASED.	C.I.

DATE  
11/28/12

DIM IN( )MM( )

155T