
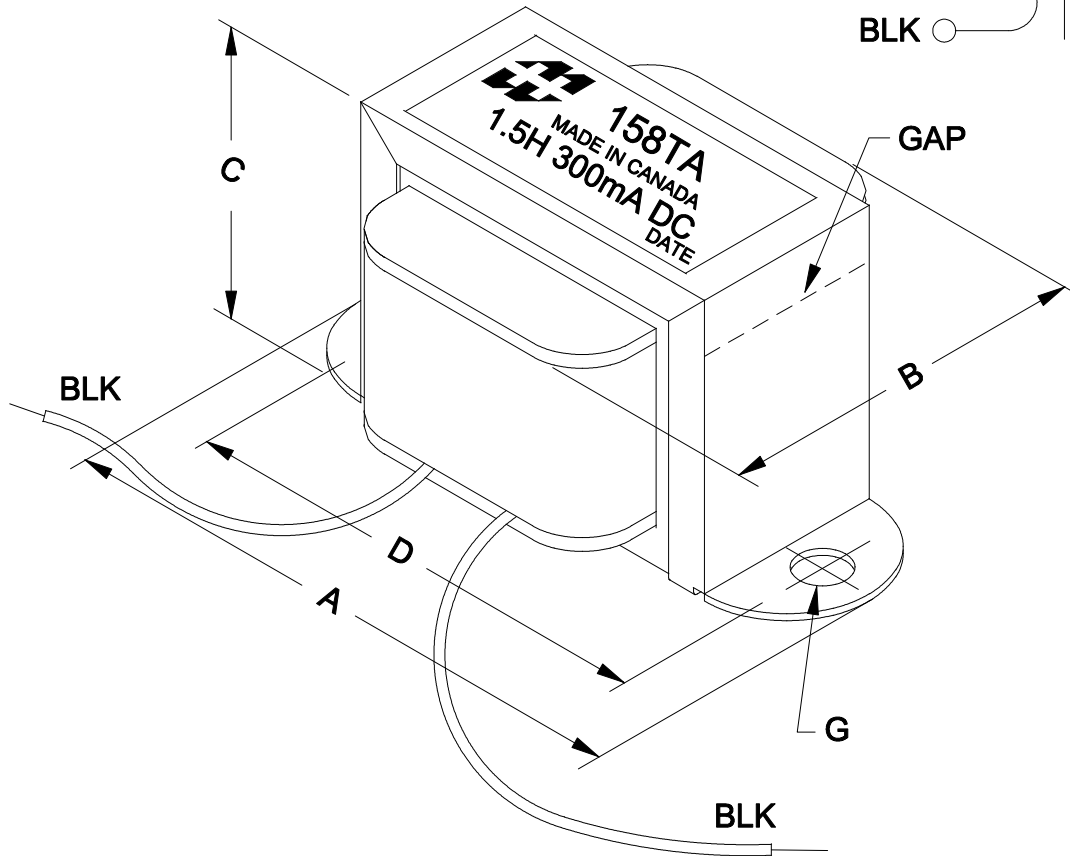


DIMENSIONS:	
A	3.688" ±0.063
B	1.965" ±0.125
C	2.308" ±0.063
D	3.125" ±0.063
G	0.187" ±0.063

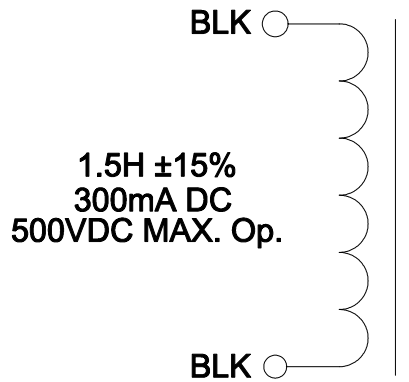

NOTE: ALL LEADS ARE 5" MIN. LONG OUT.
CLASS B (130°C) INSULATION
RoHS COMPLIANT

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
INDUCTANCE	@ 30V, 60Hz, 300mA DC, BLK - BLK	1.5H	±15%
DCR	@ 20°C, BLK - BLK =	40.06 Ω	±15%
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC	

HAMMOND
MANUFACTURING™

ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

TITLE

CHOKE

NO	DATE	REVISION	DWG. BY
0	11/28/12	RELEASED.	C.I.

DATE
11/28/12

DIM IN()MM()

158TA