
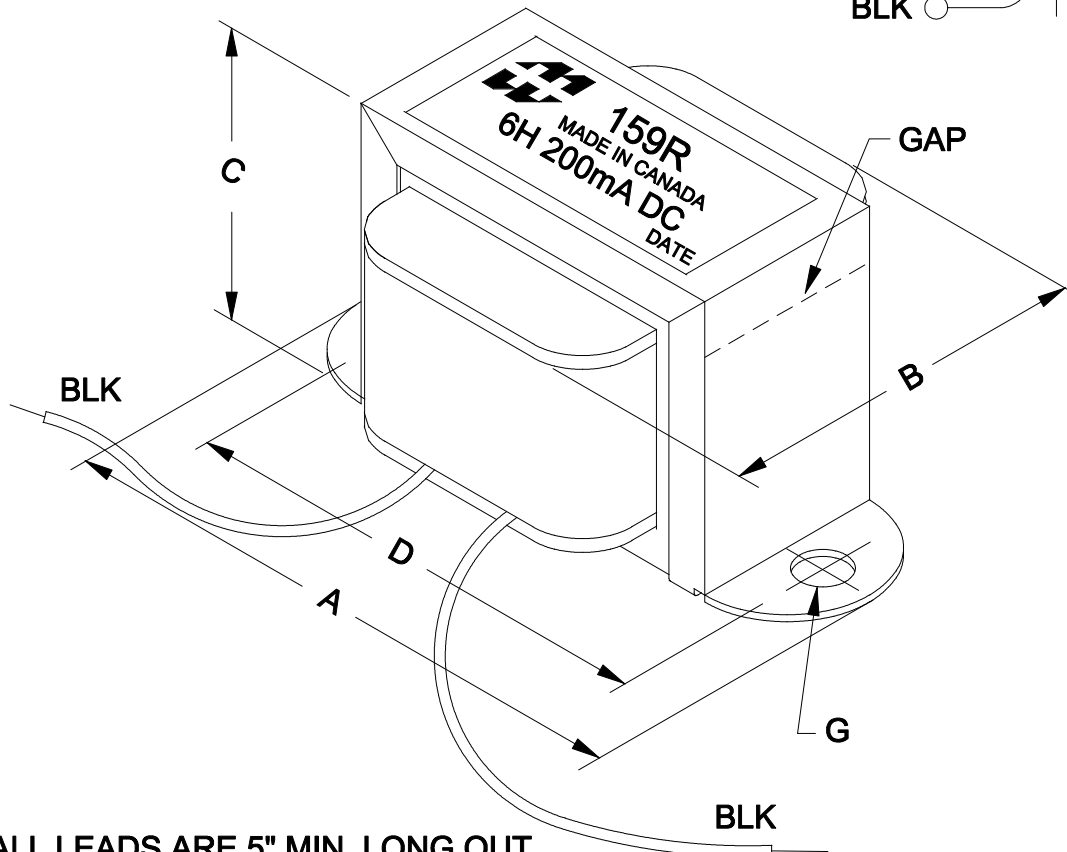


DIMENSIONS:	
A	4.000" ±0.063
B	2.085" ±0.125
C	2.625" ±0.063
D	3.563" ±0.063
G	0.187" ±0.063

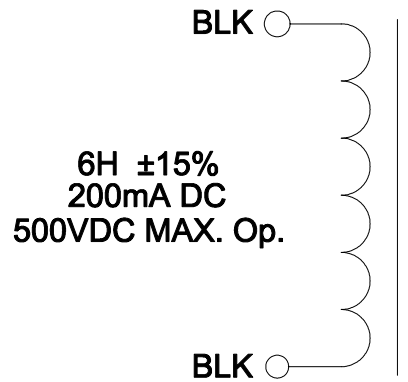

NOTE: ALL LEADS ARE 5" MIN. LONG OUT.  
CLASS B (130°C) INSULATION  
RoHS COMPLIANT

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
INDUCTANCE	@ 30V, 60Hz, 200mA DC, BLK - BLK	6H ±15%
DCR	@ 20°C, BLK - BLK =	150.1 Ω ±15%
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC

**HAMMOND**  
**MANUFACTURING**™

**ELECTRONIC DIVISION**  
52 RANKIN PLACE,  
WATERLOO, ONTARIO, N2J 3Z5  
PH # (519) 886-6181  
FAX # (519) 886-9540

TITLE				159R
CHOKE				
NO	DATE	REVISION	DWG. BY	
0	11/28/12	RELEASED.	C.I.	
			DATE	
			11/28/12	
			DIM IN(X)MM( )	