


# General Accessories

## Window Kits

### Steel and Stainless Steel Window Kits



- Designed to maintain environmental protection level of Type 4, 4X (for stainless steel) as noted
- Window is 0.25" thick, UV resistant Polycarbonate.
- Frame is heavy gauge steel, or 304 stainless steel with integral weld studs and compression clips.
- Oil resistant neoprene gasket ensures a watertight seal.
- Finished in gray or natural brushed stainless steel.

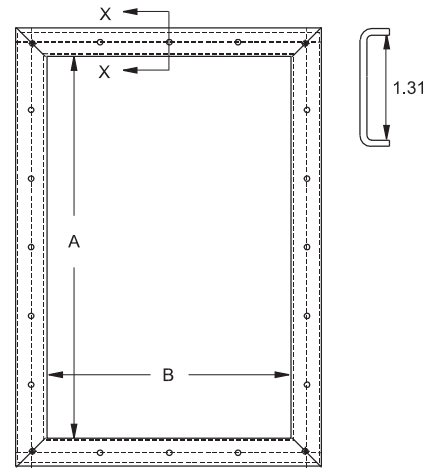

Part No.	Material	Window Dimensions		Recommended Cut-Out Size	
		A	B		
1481WN40503 <sup>1</sup>	Steel	5	3.0	6.69	4.69
1481WN40905 <sup>1</sup>	Steel	9	5.5	10.69	7.19
1481WN41303 <sup>1</sup>	Steel	13	3.0	14.69	4.69
1481WN41308 <sup>1</sup>	Steel	13	8.0	14.69	9.69
1481WN41705 <sup>1</sup>	Steel	17	5.5	18.69	7.19
1481WN41711 <sup>1</sup>	Steel	17	11.0	18.69	12.69
1481WN42315 <sup>1</sup>	Steel	23	15.0	24.69	16.69
1481WN42919 <sup>1</sup>	Steel	29	19.0	30.69	20.69
1481WN43523 <sup>1</sup>	Steel	35	23.0	36.69	24.69
1481WN4SS0503 <sup>2</sup>	Stainless Steel	5	3.0	6.69	4.69
1481WN4SS0905 <sup>2</sup>	Stainless Steel	9	5.5	10.69	7.19
1481WN4SS1308 <sup>2</sup>	Stainless Steel	13	8.0	14.69	9.69
1481WN4SS1711 <sup>2</sup>	Stainless Steel	17	11.0	18.69	12.69
1481WN4SS2315 <sup>2</sup>	Stainless Steel	23	15.0	24.69	16.69
1481WN4SS2919 <sup>2</sup>	Stainless Steel	29	19.0	30.69	20.69

<sup>1</sup> UL/ CSA Type 12 and Type 4

<sup>2</sup> UL/ CSA Type 12, Type 4 and Type 4x



### Frameless Window Kits



- Designed for indoor use on Type 12 and 13 enclosures.
- Scratch resistant polycarbonate window is 0.25 inches thick.
- Double sided tape is on the window for easy installation.
- Mounting hardware and template are included.

Part No.	Window Dimensions		Maximum Cut-Out Size	
	A	B		
1481WFL52	5.50	3.00	4.50	2.00
1481WFL133	13.88	3.88	12.88	2.88
1481WFL96	9.62	7.19	8.62	6.19



Technical references and CAD downloads available at [www.hammondmfg.com](http://www.hammondmfg.com)


All dimensions in inches unless specified otherwise

## General Accessories Window Kits




### NEMA 4 Deep Hinged Window Kits


- Extra deep kits are designed to provide protection and easy access to components and equipment installed inside an enclosure.
- Maintain environmental protection level of Type 4, 4X and 12 as noted
- Frame is 14 gauge mild steel or 316L stainless steel.
- Quarter turn latch for easy access.
- 2.5 inches of extra usable depth
- Oil resistant neoprene gasket ensures a watertight seal.
- Can be either left or right hand hinged.
- Window is 0.25" thick, UV Resistant Polycarbonate.
- Conveniently sized to allow mounting on the door of any Hammond Wallmount Series enclosure, or in any other Hammond enclosure with a suitable mounting surface.
- Mounting hardware and template are included.

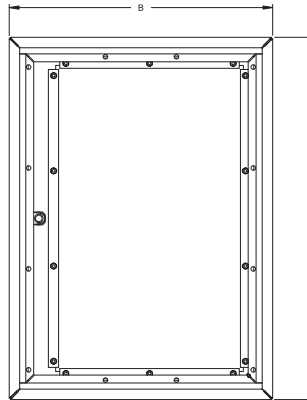


BACK VIEW

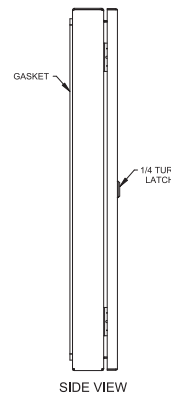

SIDE VIEW

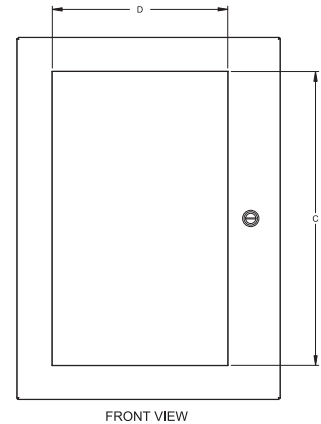

FRONT VIEW



BOTTOM VIEW

Part No.	Material	Overall Dimensions		Viewing Area			Latch Qty	Recommended Cut-Out Size	
		A	B	C	D	E			
1481WDH1418 <sup>1</sup>	Steel	12.19	14.56	8.00	9.17	2.75	1	9.19	11.56
1481WDH1612 <sup>1</sup>	Steel	14.19	8.14	10.00	2.75	2.75	1	11.19	5.14
1481WDH2016 <sup>1</sup>	Steel	18.19	12.14	14.00	6.75	2.75	1	15.19	9.14
1481WDH2416 <sup>1</sup>	Steel	22.19	12.14	18.00	6.75	2.75	1	19.19	9.14
1481WDH2420 <sup>1</sup>	Steel	22.19	16.14	18.00	10.75	2.75	1	19.19	13.14
1481WDH2430 <sup>1</sup>	Steel	22.19	26.14	18.00	20.75	2.75	1	19.19	23.14
1481WDH3024 <sup>1</sup>	Steel	28.19	20.14	24.00	14.75	2.75	2	25.19	17.14
1481WDH3624 <sup>1</sup>	Steel	34.19	20.14	30.00	14.75	2.75	2	31.19	17.14
1481WSSDH1418 <sup>2</sup>	Stainless Steel	12.19	14.56	8.00	9.17	2.75	1	9.19	11.56
1481WSSDH1612 <sup>2</sup>	Stainless Steel	14.19	8.14	10.00	2.75	2.75	1	11.19	5.14
1481WSSDH2016 <sup>2</sup>	Stainless Steel	18.19	12.14	14.00	6.75	2.75	1	15.19	9.14
1481WSSDH2416 <sup>2</sup>	Stainless Steel	22.19	12.14	18.00	6.75	2.75	1	19.19	9.14
1481WSSDH2420 <sup>2</sup>	Stainless Steel	22.19	16.14	18.00	10.75	2.75	1	19.19	13.14
1481WSSDH2430 <sup>2</sup>	Stainless Steel	22.19	26.14	18.00	20.75	2.75	1	19.19	23.14
1481WSSDH3024 <sup>2</sup>	Stainless Steel	28.19	20.14	24.00	14.75	2.75	2	25.19	17.14
1481WSSDH3624 <sup>2</sup>	Stainless Steel	34.19	20.14	30.00	14.75	2.75	2	31.19	17.14

<sup>1</sup> UL/ CSA Type 12 and Type 4

<sup>2</sup> UL/ CSA Type 12, Type 4 and Type 4x

Technical references and CAD downloads available at [www.hammondmfg.com](http://www.hammondmfg.com)

All dimensions in inches unless specified otherwise

**Quality Products. Service Excellence.**