


# CONTEMPRA - SERIES

## ASSEMBLY INSTRUCTIONS FOR ADJUSTING RAIL CENTERS ON 19 AND 24 INCH RACKING SYSTEMS

BUL10124  
REV. A  
PAGE 1 OF 1

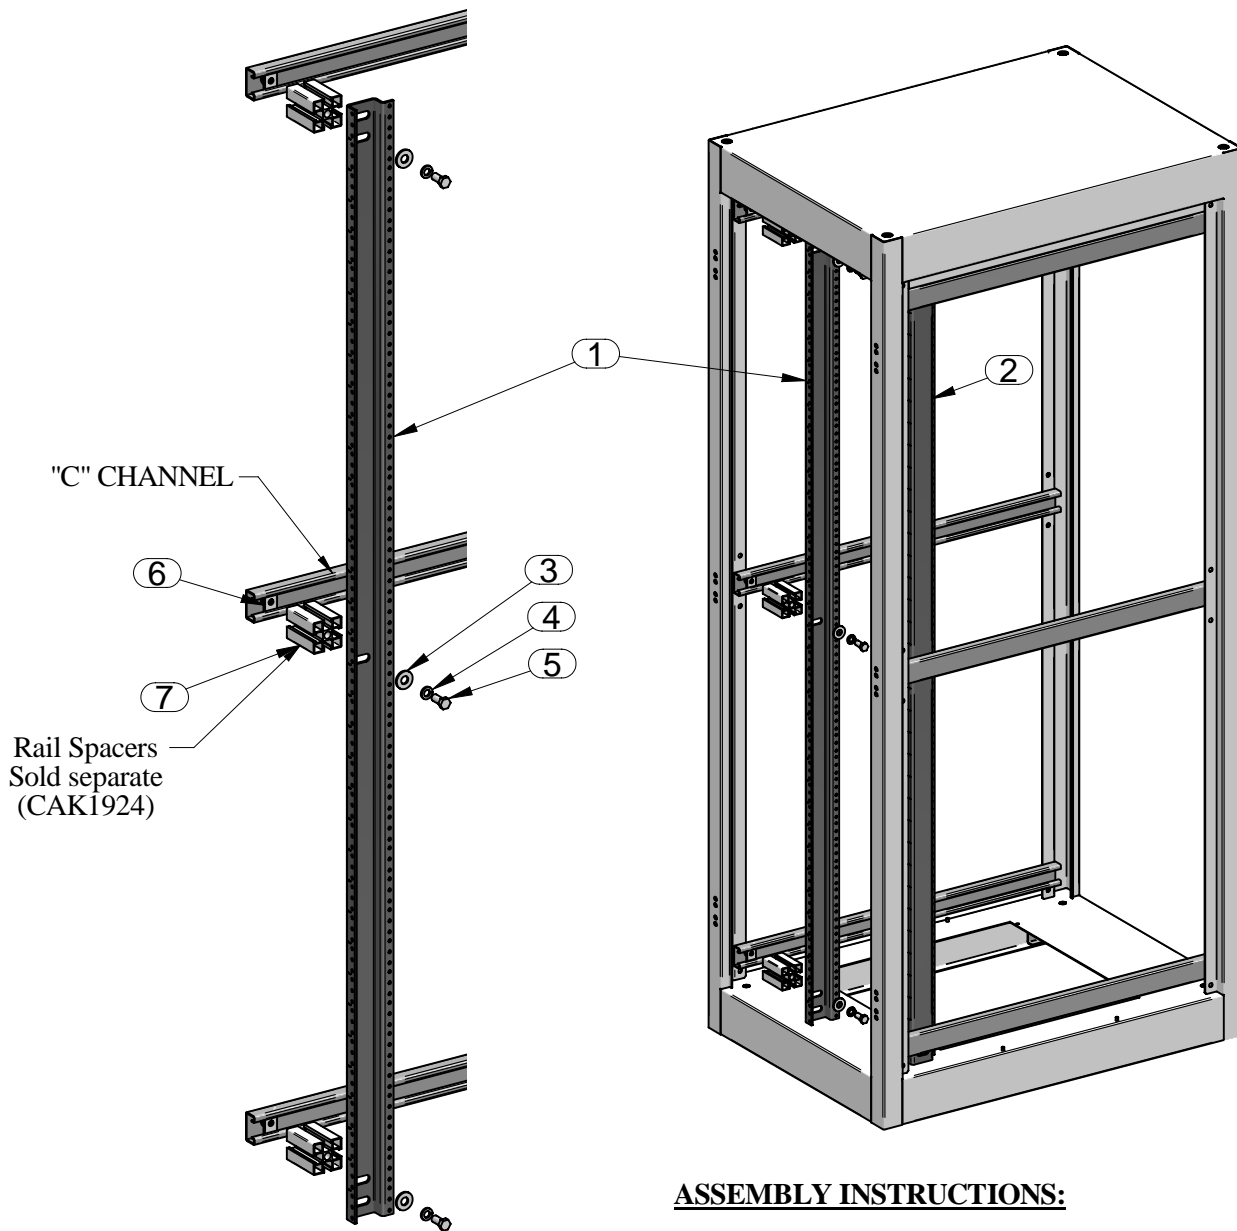

### ASSEMBLY INSTRUCTIONS:

- A) Place spring nuts (item 6) in C channel at desired location for mounting rails
- B) Align mounting slots in rail (item 1 or 2) with spring nuts. Secure using 3/8 flat and lock washers and 3/8-16 x 7/8 screw (items 3, 4 & 5).

Note: If mounting rails in a 24" racking system rail spacers (item 7) are required to achieve 19" mounting gap. Rail spacers are placed between C channel and rail.

- C) Ensure rail is perpendicular to bottom and tighten all screws.

PARTS LIST		
ITEM No.	DESCRIPTION	QTY
1	LH RAIL	1
2	RH RAIL	1
3	3/8 FLAT WASHER	4 or 6
4	3/8 LOCK WASHER	4 or 6
5	3/8-16 X 7/8 CAP HEX	4 or 6
6	3/8 SPRING NUT	4 or 6
7	RAIL SPACERS TO 19" MOUNTING	4 or 6

#### TOOL BOX



9/16" Socket  
Wrench



Square



visit our website @ [www.hammondmfg.com](http://www.hammondmfg.com)